


Female Header
Dual Row
W/P S.M. Type Base 2.00H

Pitch:1.00mm

Series
252

sgdconn

Http://www.sgdconn.com





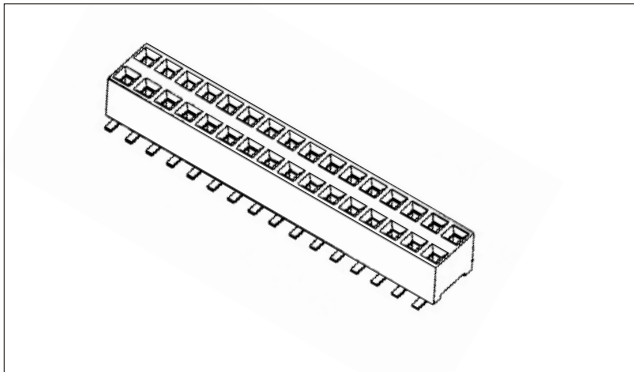


SPECIFICATIONS:

Current Rating: 1.0 AMP
Contact Resistance: 30m• Max
Insulation Resistance: 500M• Min
Withstand Voltage: 200VAC/minute
Operation Temperature: -40°C to +105°C
Max Process Temp: 230°C for 30~60 secretary.

MATERIALS:

Contact Material: Copper Alloy
Contact Plating: Gold or Tin over 50μ "Ni
Insulator Material: Polyester(UL94V-0)
Standard: LCP

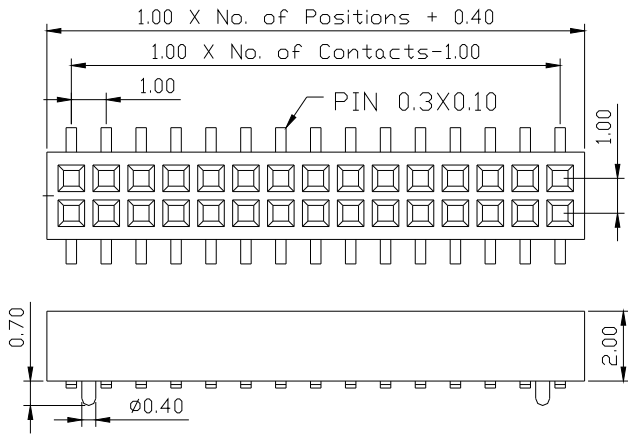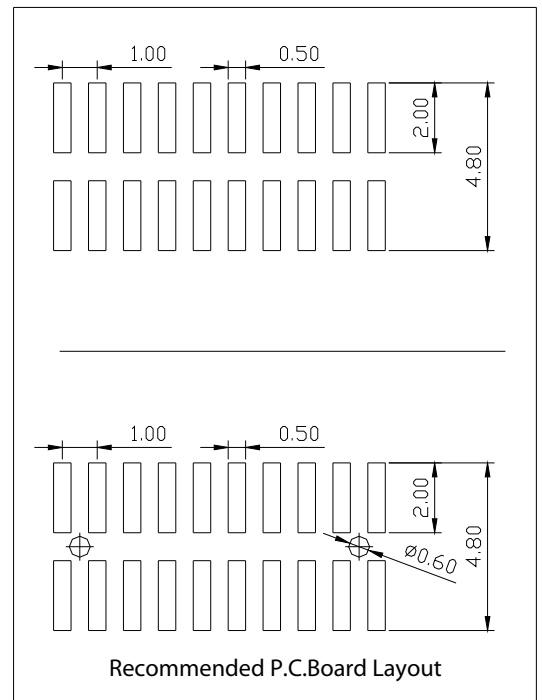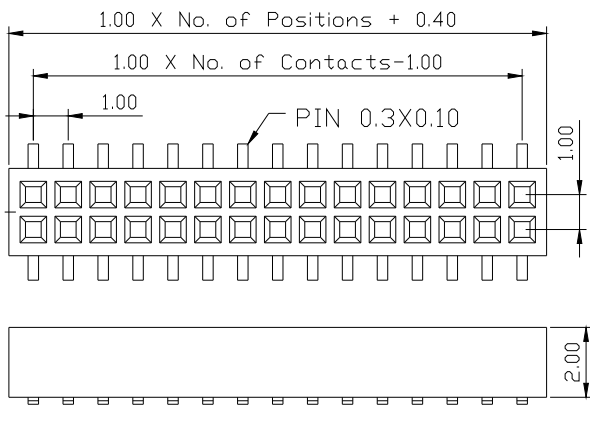

Ordering Code

①②③④⑤⑥⑦⑧⑨⑩
2 5 2 2 XX M X X 1 0

- ① Series No.:
2= Female Header
- ② Pitch: 5= 1.00mm
- ③ Insulator Height:
2 = 2.0mm

- ④ Dip Spacing:
1=Single row
2=Double row

- ⑤ Number of Contacts:
Single row 01 to 40
Double row=02 80

- ⑥ Tail& Mounting Style:
M=Straight SMT type

- ⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u"

- ⑧ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46

- ⑨ Color:1=Black
- ⑩ Customer Request

Due to technicprogress, all the information provided subject to change without prior notice.