

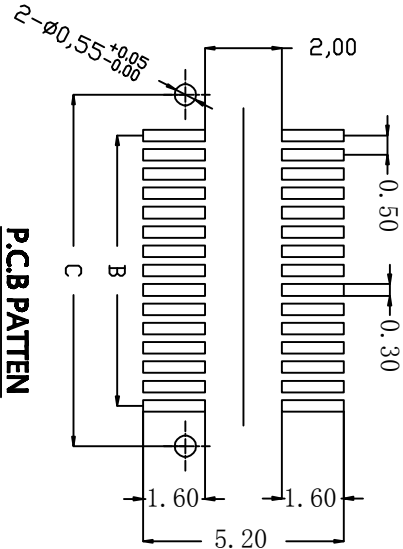
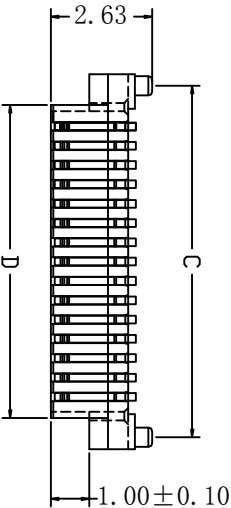
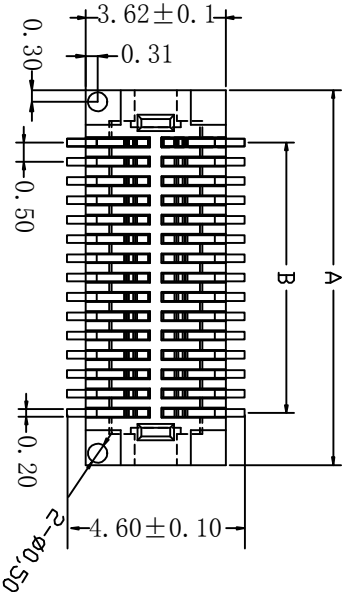


High photos/rhtests (H)	The female seat height (H1)	The male seat height (H2)	Insertion height (H3)
3.0±0.1	2.3±0.05	2.2±0.05	1.5±0.05



P.C.B PATTEN

Electrical:
Vlotag Rating:50V AC(rms)/DC
Current Rating:0.5A AC(rms)/DC
Contact Resistance:50mΩ Max
Insulation Resistance:100 MΩ min
Dielectric Withstanding Voltage:200V AC r. m. s
Operating Temperature:-30℃~+80℃
Material:
Housing:High Temperature Plastic
UL94V-0
Terminal:Copper Alloy
Material:PA9T NC
Contact:phosphor Bronze, Gold Plating:



ASSEMBLY

NO. of Contacts	Dimension (mm)			
	A±0.10	B±0.10	C±0.10	D±0.10
20	7.20	4.50	6.80	5.60
30	9.70	7.00	9.10	8.10
40	12.20	9.50	11.60	10.60
50	14.70	12.00	14.10	13.10
60	17.20	14.50	16.60	15.60
80	22.20	19.50	21.60	20.60

Ordering Information

SGD-05 -M - XXXP- 22 - G2 1

PITCH 05=0.5mm
M=male F=female NO. of pins
020=20pin 030=30pin 040=40pin 050=50pin 060=60pin 080=80pin
The female or Male seat height (H2)
Contact Plating GO:Gold flash G1:1U" Gold G2:2U" Gold
BOSS 0=Without boss 1=With boss

单位	M	M	尺寸公差	深圳市山谷道电子有限公司 SHENZHEN SHANGUDAO ELECTRONIC CO.,LTD			
日期	14.08.30	0	±0.05 ±0.10 ±0.20				
比例	1:1	角度公差	±1°	物料编号	SGD-05-M-xxxP-22-G21		
绘制		版本	±0.5°	品名	单槽0.5 BTB 公座H2.2 台高3.0	图号	xx001
校对		审核		包装规格	卷带1000PCS/R		