

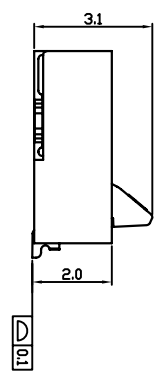
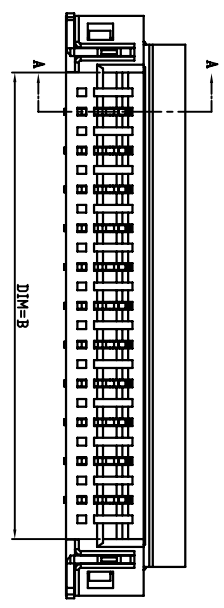
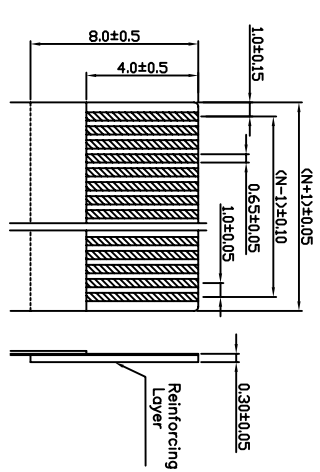


RECOMMENDED PCB PATTERN LAYOUT

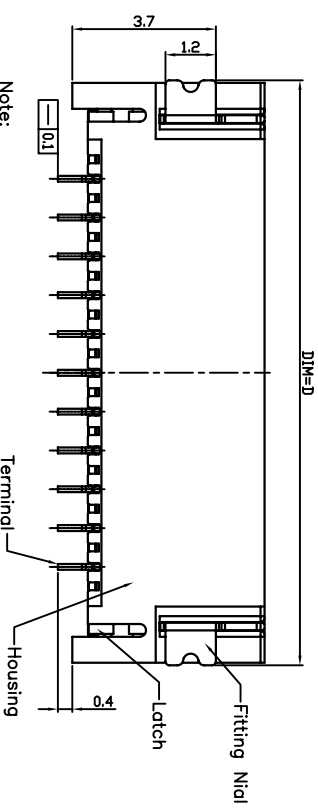

SECTION A-A



RECOMMENDED FPC/FPC DIM.

Pin 脚	DIM=A	DIM=B	DIM=C	DIM=D
3P	2.00	4.10	7.0	7.1
4P	3.00	5.10	8.0	8.1
5P	4.00	6.10	9.0	9.1
6P	5.00	7.10	10.0	10.1
7P	6.00	8.10	11.0	11.1
8P	7.00	9.10	12.0	12.1
9P	8.00	10.10	13.0	13.1
10P	9.00	11.10	14.0	14.1
11P	10.00	12.10	15.0	15.1
12P	11.00	13.10	16.0	16.1
13P	12.00	14.10	17.0	17.1
14P	13.00	15.10	18.0	18.1
15P	14.00	16.10	19.0	19.1
16P	15.00	17.10	20.0	20.1
17P	16.00	18.10	21.0	21.1
18P	17.00	19.10	22.0	22.1
19P	18.00	20.10	23.0	23.1
20P	19.00	21.10	24.0	24.1
21P	20.00	22.10	25.0	25.1
22P	21.00	23.10	26.0	26.1
23P	22.00	24.10	27.0	27.1
24P	23.00	25.10	28.0	28.1
25P	24.00	26.10	29.0	29.1
26P	25.00	27.10	30.0	30.1
27P	26.00	28.10	31.0	31.1
28P	27.00	29.10	32.0	32.1
29P	28.00	30.10	33.0	33.1
30P	29.00	31.10	34.0	34.1
31P	30.00	32.10	35.0	35.1
32P	31.00	33.10	36.0	36.1
33P	32.00	34.10	37.0	37.1
34P	33.00	35.10	38.0	38.1
35P	34.00	36.10	39.0	39.1
36P	35.00	37.10	40.0	40.1
37P	36.00	38.10	41.0	41.1
38P	37.00	39.10	42.0	42.1
39P	38.00	40.10	43.0	43.1
40P	39.00	41.10	44.0	44.1

- Note:
- Material:
    - Housing: thermoplastic high temp. UL94V-0; Color: natural.
    - Latch: thermoplastic high temp. UL94V-0; Color: natural or black.
    - Terminal: copper alloy.
    - Fitting Nail: copper alloy.
  - Finish:
    - Terminal:
      - Underplating: Matte TIN 100u" MIN. And NICKEL 50u" Min
      - Fitting Nail:
        - Underplating: Matte TIN 100u" MIN. And NICKEL 50u" Min
        - Fitting Nail:
          - Underplating: Matte TIN 100u" MIN. And NICKEL 50u" Min
          - Product must comply Reh's specification.

NO. OF CONTACT CODE

18DUAL CONTACT  
1: Tube Ball  
2: Tape Ball  
Plating code:  
1: Tin-Immersion  
2: Gold Plating  
3: Gold Dip  
4: Gold Sp

SER	AREA	REVISIONS	CHK	DATE

山谷道 深圳市山谷道电子有限公司

APPROVED	DATE	PART NO
		SGD-18-**-03-22
CHECKED	DATE	DRAWING NO
DRAWN	DATE	COMPUTER NO
UNIT	SCALE	SIZE
MM	1:1	A3

UNLESS OTHERWISE SPECIFIED	TOLERANCES ARE
XX	±0.20
XXX	±0.10
X.XXX	
ANG.	
	±0.30°

REV	REV
Δ	Δ